

Ratio Options	1
4PD08	
1.40 Dec.	
1.34 Dec.	
1.23 Dec.	
1.13 Dec.	
1:1	
1.13 Inc.	
1.23 Inc.	
1.34 Inc.	
1.40 Inc.	
1.53 Inc.	



SAE Clutch Housing Options			
SAE No.	Dim. A	Dim. B	Bolt Size & Qty.
1	20.875	20.125	7/16-14 (12)
2	18.375	17.625	3/8-16 (12)
3	16.875	16.125	3/8-16 (12)

SAE Clutch Options					
Clutch No.	Dim. C	Dim. D	Dim. F	Dim. G	Bolt Size & Qty.
SP214	18.375	17.250	11.12	1.00	(8) 17/32
SP211	13.875	13.125	8.25	1.56	(8) 13/32
SP114	18.375	17.250	8.25	1.00	(8) 17/32
C111	13.875	13.125	8.25	1.56	(8) 13/32
C110	12.375	11.625	8.25	2.12	(8) 13/32

Pilot Bearing	
Std. Bearing No.	Dim. E
6407 ZZ	3.9370
6307 ZZ	3.1496
6207 ZZ	2.8346

SAE Pump Pad Adapters				
SAE Size	Bolt Size & Qty.	Bolt Circle	Pilot Dia.	Dim. H
A	3/8-16 (2)	4.187	3.25	5.69
B	1/2-13 (2)	5.750	4.00	5.69
B	1/2-13 (4)	5.000	4.00	5.69
C	5/8-11 (2)	7.125	5.00	5.69
C	1/2-13 (4)	6.375	5.00	5.69
D	3/4-10 (4)	9.000	6.00	5.69
D2	3/4-10 (2)	9.000	6.00	5.81
E	3/4-10 (4)	12.500	6.50	5.81
F	1.00-8 (4)	13.781	7.00	6.19

SAE Pump Spine Adapters	
SAE Size	Teeth & Pitch
A	9T-16/32
B	13T-16/32
BB	15T-16/32
C	14T-12/24
CC	17T-12/24
D	13T-8/16
F	15T-8/16
21	21T-16/32
23	23T-16/32
27	27T-16/32

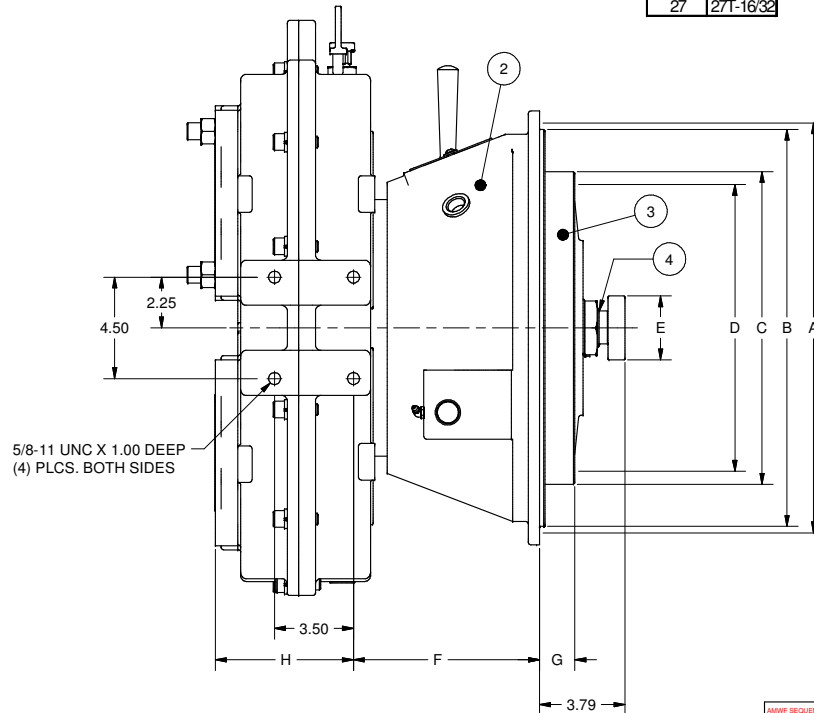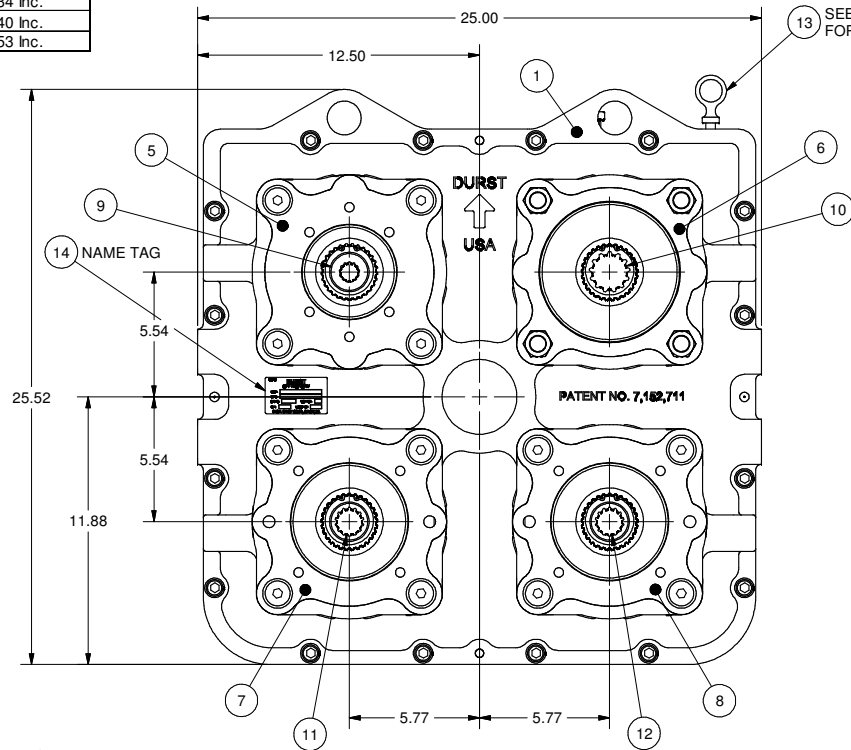

NOTE:

- REFER TO ASSEMBLY BOOK FOR ADAPTER MOD DRAWINGS.
- LUBRICATE ALL ORINGS PRIOR TO INSTALLATION.
- APPLY SILVER STREAK #200S TO EXTERNAL SPLINES OF INPUT SHAFT.
- USE LOCTITE 609 WHEN INSTALLING EXP. PLUG, P/N 012043.
- USE LOCTITE 609 WHEN INSTALLING DIPSTICK, AND DIPSTICK HOLE PLUG, P/N 012326.
- DO NOT USE LOCTITE ON PUMP PAD SCREWS.
- TIGHTEN 1/2" SCREWS: 105 FT.LBS.
- TIGHTEN 5/8" SCREWS: 210 FT.LBS.
- OIL MUST MEET API GL-5 SPEC: 80W90, EP90 OR EQUIVALENT.
- WHEN ORDERING PARTS REFER TO THE DURST SERVICE MANUAL.

PATENT NO. 7,152,711

CAUTION

Always insure that your powertrain is free of torsional vibrations. DURST is not responsible for damage or failure due to unaddressed torsional vibrations.

NO.	REV.	DATE	DESCRIPTION	BY	DATE
6	30214		DIM "F" FOR SP214 WAS 11.20, ALL OTHER "F" DIMS WERE 8.89	KTS	9/24/10
5	27445		ADDED 1:13 RATIOS	KTS	12/7/07
4	27445		REVISE NOTE 9, ADD PATENT NO.	WEM	6/5/07
3	25834		UPDATED SPLINE CHART	NJS	11/05/04
2	25724		UPDATED ITEM NUMBERS	NJS	9/24/04
1	24569		RELEASED TO PRODUCTION	WEM	9/3/04

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED
CASTINGS
ALLOW .12 FINISH STOCK ON MACHINING SURFACES
FILLETS AND RADI: 12 MAX.
MACHINING TOLERANCES
X ± .000
XX ± .010
XXX ± .005
FRAC ± 1/64
ANGLE ± 30°
15°/FINISH
MATERIAL
MODEL
WHERE USED
N/A
DRAWN BY
WEM
DATE
9/3/04

THIS PRINT IS CONFIDENTIAL AND IS THE PROPERTY OF DURST, DIV. REGAL-BELT CO. INC.			
THIS PRINT SHALL NOT BE USED, COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR SHALL THE CONTENTS BE REVEALED IN ANY MANNER TO ANYONE UNLESS WRITTEN PERMISSION IS OBTAINED FROM DURST, DIV. REGAL-BELT CO. INC.			
SCALE	THRU ANGLE PROJECT	DATE	TITLE
3/8:1		9/3/04	4PD08 CLUTCH CHARTED DRAWING
PART NO.	4PD08C	SIZE	D

DURST
DIVISION OF REGAL-BELT CORP.
P.O. BOX 298
BELLEVILLE, MISSOURI 63811

AM/FM SEQUENCE NO.

REF